


## UHF Flexible Tag

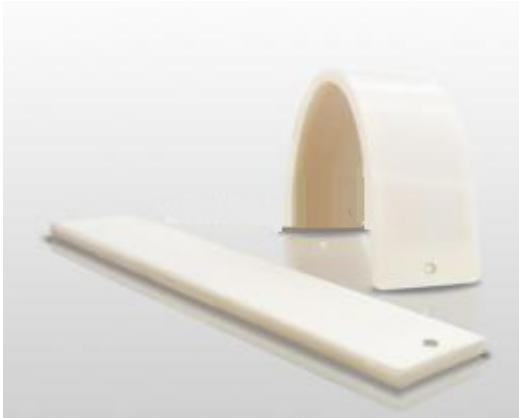

### Typical Applications:

SGT-805 flexible UHF laundry tag targets asset management and industrial application in UHF technology. Resilient and bendable, Flexible Tag gives enormous possibilities to RFID creative ideas in non-metal environment.

- Asset Tracking
- Inventory Control
- Factory Automation
- Normal laundry (including industrial grade laundry)

### Technology Parameters

Dimension	L 60 x W 12 x T 1,6 mm
Operating Frequency	UHF / ICODE SLIX
Reading Range	Depending on the reader and local installation conditions
Case Material	Silicone
Operation temp.	-20 °C ~ +55 °C / RH60%
Storage temp.	-40 °C ~ +100 °C / RH60%
Heat Resistance	Drying: +85 °C (up to 60mins) / +120 °C (up to 10min) Ironing: +200 °C (up to 10sec with press cloth)
Chemical Resistance	Detergent, Softener, Bleach (Oxygen/Chlorine), Alkali
Protection Class	IP68
Assembly	Injection Molding
Tagging	Sewing, Heat-sealing
Standard Color	white
Approx. Weight	1,6 g
Package size	2000 pcs / box
Options	Printing: Pad printing, Laser Engraving ID numbering: Laser Engraving

Address: EUROPROX Bt.  
H-8000 Szekesfehervar  
Turoci u. 28/A.

Phone: (+36) 22 300 528

Mobil: (+36) 20 439 4652

E-mail: info@europorx.hu

WEB: www.europorx.hu