

TWC - ISO Proximity Card

PERSONAL IDENTIFICATION

LOW PRICE

Our contactless ISO Card is a perfect choice for RFID application in both low and high frequencies.

The blank white card we offer can be processed with common card printer.


Slot punch marks, magnetic stripe and additional customized printing options are available.



APPLICATIONS

- Public Transport
- Time and Attendance
- Entertainment business and Educational institutions for Security and Access Control
- E-Commercial
- Customs Clearance

CARD OPTIONS

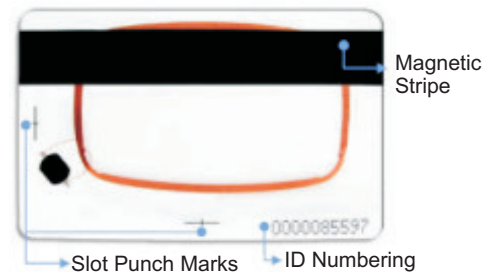

SPECIFICATIONS

Product Name:	TWC - ISO	
	Proximity Card	
Dimensions (LxWXT):	86 x 54 x 0,8 (+/-0.04) mm	
Available RFID chips:	125KHz - TK4100, EM4100, EM4102, EM4200, EM4450, EM4135, ATA5567, ATA5577, T5557, T5551, HITAG 1, HITAG 2, HITAG S256, HITAG S2048, 13.56MHz - MIFARE S50 (1K), MIFARE S70 (4K), MIFARE Ultralight, MIFARE DESFire MF3ICD40, I.CODE1, I.CODE SLI, LEGIC MIM256, JWL872, TI256, TI2048INSIDE picopass 2KS	
Working Frequency:	125 KHz / 13.56 MHz	
Reading Range:	Depending on the reader design.	
Material:	PVC or PET	
Operating Temperature:	-10 - 50 °C	
Storage Temperature:	-10 - 50 °C	
Protection Class:	IP68	
Standard Color:	Matte / Glossy	
Approx. Weight:	5,8 (+/-0.5) g	
Packaging:	200 pcs/box, 2000 psc/carton, 14 kgs/carton	
Options:	Printing	Offset / Silk Screen / Thermal Printing
	ID Numbering	InkJet / Thermal Printing, Laser Engraving
	Magnetic Stripe	HiCo - 2750o.e. / 4000o.e.
		LoCo - 350o.e. / 650o.e.



Access Control

Address: EUROPROX Bt.
H-8000, Szekesfehervar
Turoci utca 28/A. HUNGARY

Phone: (+36) (22) 300-528
Mobil Phone: (+36) (20) 439-4652
E-mail: info@europrox.hu
WEB: www.europrox.hu